

GPS Screw Mount Antenna

Feature :

- Exquisite appearance
- Full day working
- Optimized dimension
- low standing wave, strong anti-interference ability

Application:

- Applicable to terminals
- 2G/3G UMTS/ WLAN/ GPS system

Electrical specifications	
	GPS
Frequency range(MHz)	1575.42 ± 3Mhz
V.S.W.R	≤1.8
Gain	28dbi
Impedance	50 Ω
Polarization type	Vertical
Power Capacity (w)	50 W
Mechanical specifications	
connector	SMA M & SMA M RP
Colour	BLACK
Material	PLASTIC
Dimension	Φ46×15mm
Weight (g)	150g
Operating Temp(°C)	"-40°C~+60°C"
	ROHS COMPLAINT


Regd Add: F36a, Street No.8, Vishwas Park, Uttam Nagar, New Delhi - 110059

Tel: +91-9716582707 , +91-8810686612

Email: info@agartel.com , sales@agartel.com

web: www.agartel.in / www.rfcableconnector.in

Drawing:

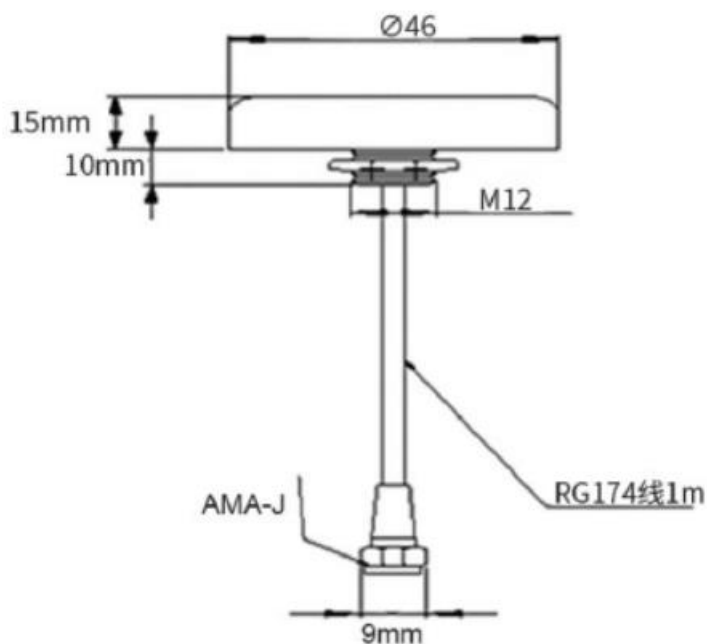

Regd Add: F36a, Street No.8, Vishwas Park, Uttam Nagar, New Delhi - 110059

Tel: +91-9716582707 , +91-8810686612

Email: info@agartel.com , sales@agartel.com

web: www.agartel.in / www.rfcableconnector.in