

Combination Antenna Screw Mount – 4G/Wifi

Feature :

- Exquisite appearance
- Full day working
- Optimized dimension
- low standing wave, strong anti-interference ability

Application:

- Applicable to terminals
- 2G/3G UMTS/ WLAN/ GPS system

Electrical specifications		
	4G	Wi-Fi
Frequency range(MHz)	698 ~ 960/1710 ~ 2700MHz	2400-2500Mhz
V.S.W.R	≤1.5	≤1.8
Gain	3/4dbi	4dbi
Impedance	50 Ω	50 Ω
Polarization type	Vertical	
Power Capacity (w)	50 W	
Mechanical specifications		
connector	SMA M & SMA M RP	
Colour	BLACK	
Material	PLASTIC	
Dimension	Φ46×15mm	
Weight (g)	150g	
Operating Temp(°C)	"-40°C~+60°C"	
	ROHS COMPLAINT	


Regd Add: F36a, Street No.8, Vishwas Park, Uttam Nagar, New Delhi - 110059

Tel: +91-9716582707 , +91-8810686612

Email: info@agartel.com , sales@agartel.com

web: www.agartel.in / www.rfcableconnector.in

Drawing:

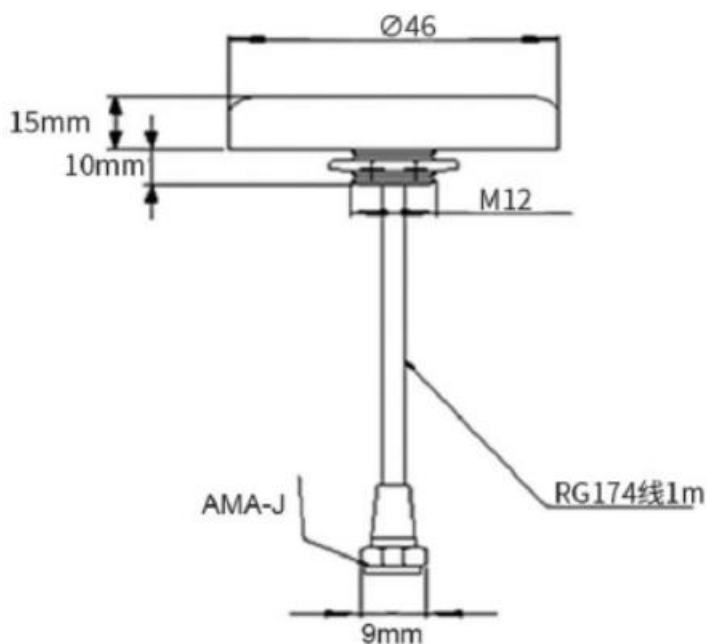

Regd Add: F36a, Street No.8, Vishwas Park, Uttam Nagar, New Delhi - 110059

Tel: +91-9716582707 , +91-8810686612

Email: info@agartel.com , sales@agartel.com

web: www.agartel.in / www.rfcableconnector.in