

Combination Antenna Screw Mount – 4G/GPS

Feature :

- Exquisite appearance
- Full day working
- Optimized dimension
- low standing wave, strong anti-interference ability

Application:

- Applicable to terminals
- 2G/3G UMTS/ WLAN/ GPS system

Electrical specifications			
	4G	GPS	
Frequency range(MHz)	698 ~ 960/1710 ~ 2700MHz	1575.42 ± 3Mhz	
V.S.W.R	≤1.5	≤1.8	
Gain	3/4dbi	28dbi	
Impedance	50 Ω	50 Ω	
Polarization type	Vertical		
Power Capacity (w)	50 W		
Mechanical specifications			
connector	SMA M & SMA M RP		
Colour	BLACK		
Material	PLASTIC		
Dimension	Φ46×15mm		
Weight (g)	150g		
Operating Temp(°C)	"-40°C~+60°C"		
	ROHS COMPLAINT		


Regd Add: F36a, Street No.8, Vishwas Park, Uttam Nagar, New Delhi - 110059

Tel: +91-9716582707 , +91-8810686612

Email: info@agartel.com , sales@agartel.com

web: www.agartel.in / www.rfcableconnector.in

Drawing:

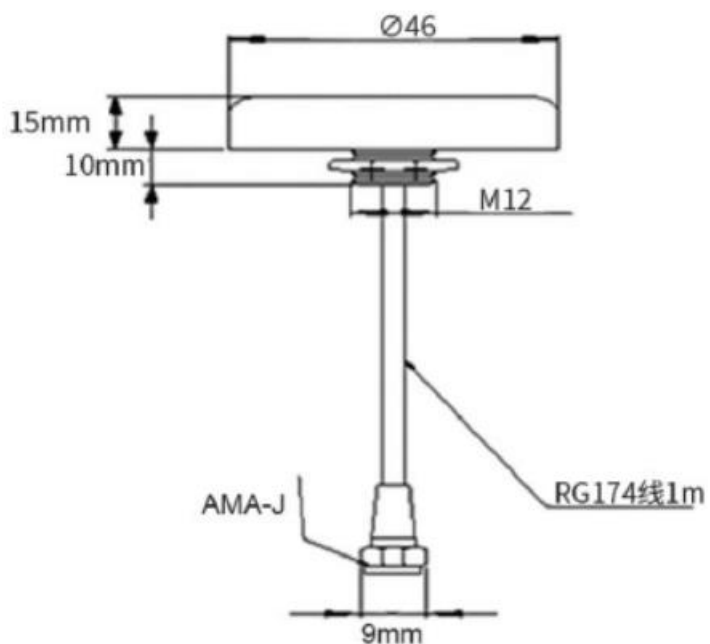

Regd Add: F36a, Street No.8, Vishwas Park, Uttam Nagar, New Delhi - 110059

Tel: +91-9716582707 , +91-8810686612

Email: info@agartel.com , sales@agartel.com

web: www.agartel.in / www.rfcableconnector.in