

2.92mm (F) to 2.92mm (F) 4Hole Adapters




Electrical data		Requirements	
Frequency range		DC-40GHZ	
Characteristic impedance		50Ω	
VSWR		≤1.20	
Mechanical data		Requirements	
Durability (mattings)		≥500	
Environmental data		Requirements	
Temperature range		-55°C to +165°C	
Material data		Requirements	
Connector parts		Material	Plating
Body		Stainless steel	Passivized
Pin contacts		Beryllium-Copper	Gold
Insulators		PEI	

Regd Add: F36a, Street No.8, Vishwas Park, Uttam Nagar, New Delhi - 110059

Tel: +91-9716582707 , +91-8810686612

Email: info@agartel.com , sales@agartel.com

web: www.agartel.in / www.rfcableconnector.in

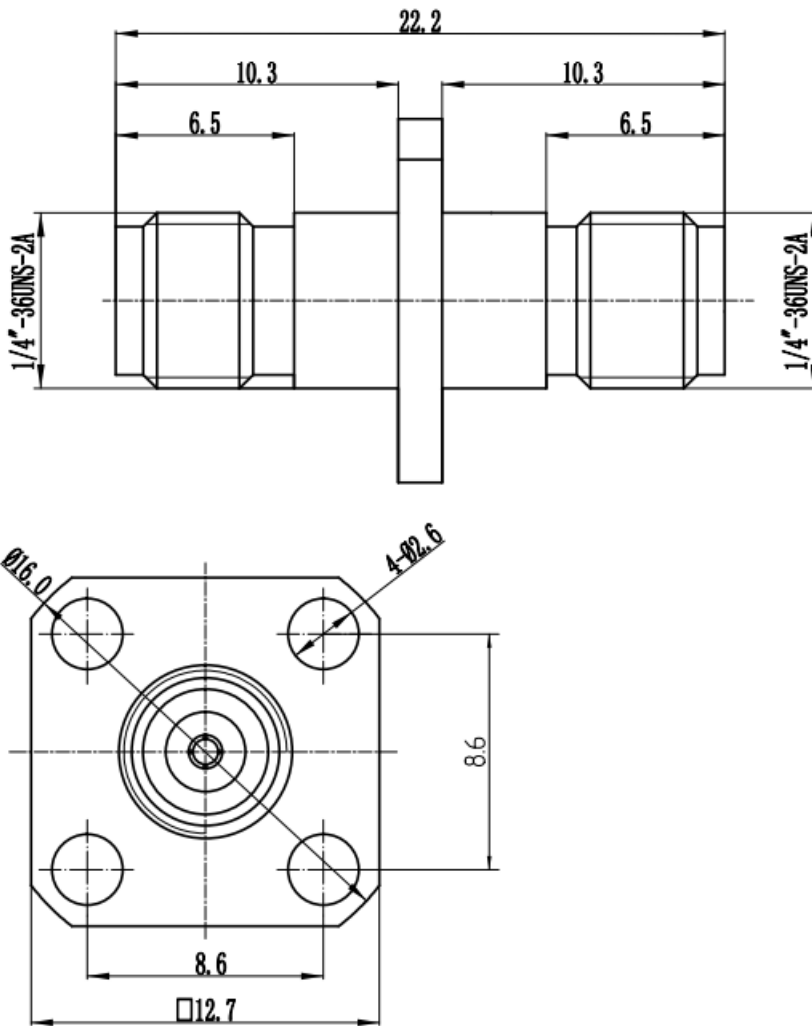

Regd Add: F36a, Street No.8, Vishwas Park, Uttam Nagar, New Delhi - 110059

Tel: +91-9716582707 , +91-8810686612

Email: info@agartel.com , sales@agartel.com

web: www.agartel.in / www.rfcableconnector.in