


2.92 (F) Edge PCB Mount Connector

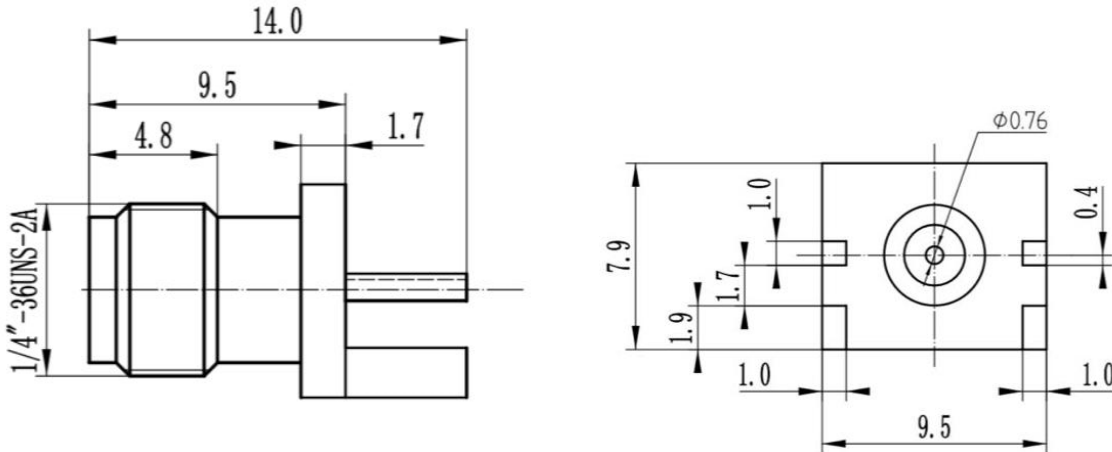

Electrical data		Requirements
Frequency range		DC-50GHZ
Dielectric withstanding voltage		$\geq 750V$
Characteristic impedance		50 Ω
Insulation Resistance		$\geq 3000M\Omega$
VSWR		$\leq 1.25:1$
Mechanical data		Requirements
Durability (mattings)		≥ 500
Environmental data		Requirements
Temperature range		-55°C to +165°C
Material data		Requirements
Connector parts	Material	Plating
Body	Stainless steel	Passivized
Pin contacts	Beryllium-Copper	Gold
Insulators	PEI	

Regd Add: F36a, Street No.8, Vishwas Park, Uttam Nagar, New Delhi - 110059

Tel: +91-9716582707 , +91-8810686612

Email: info@agartel.com , sales@agartel.com

web: www.agartel.in / www.rfcableconnector.in